



Intercall 600	✓
Intercall 700	✓

CS1 Ceiling Pull Switch.


Ceiling Pull Switches are used in bathrooms, fitted to the ceiling over the toilet and bath to allow a call to be generated from these areas. They are fitted with 3 metre length of cord terminated with an easy to operate 'G' style pull and twin re-assurance indicators.

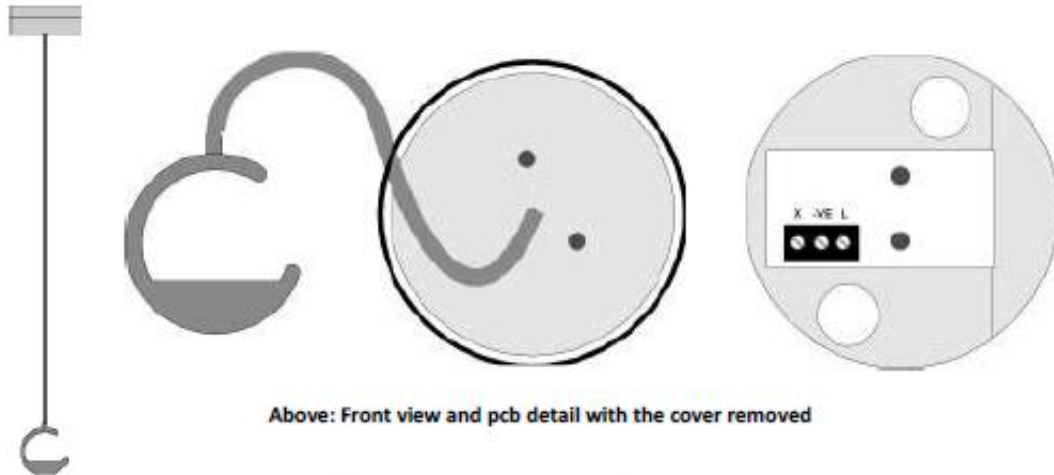

Above: Front view and pcb detail with the cover removed

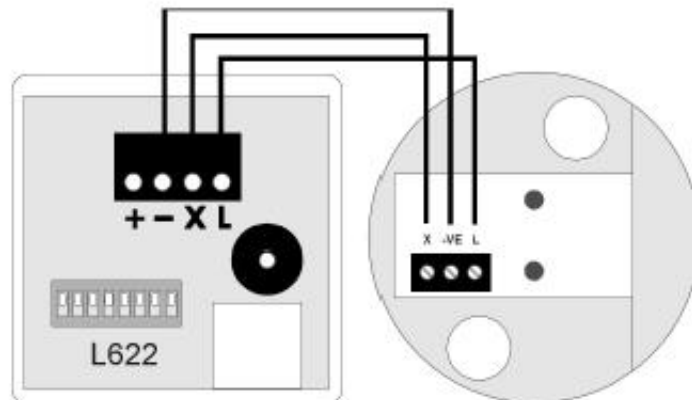

CS1 Connects to call point 'X' '-ve' and 'L' terminals (L622 call point shown above)

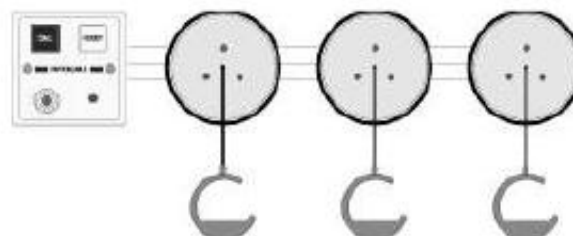

Very Important: A MAXIMUM OF 3 CS1 UNITS MAY BE CONNECTED TO ONE CALL POINT

- | | |
|----------------------------|--|
| Cord: | Three metres orange with easy to operate 'G' pull in orange. |
| Installation: | Surface mount in self contained enclosure. |
| Size & Weights: | Diameter 80mm x depth 30mm weight 50g |
| Important: | You must not mix old style Red LED and new style Clear LED Ceiling Pull switches on the same call point. |